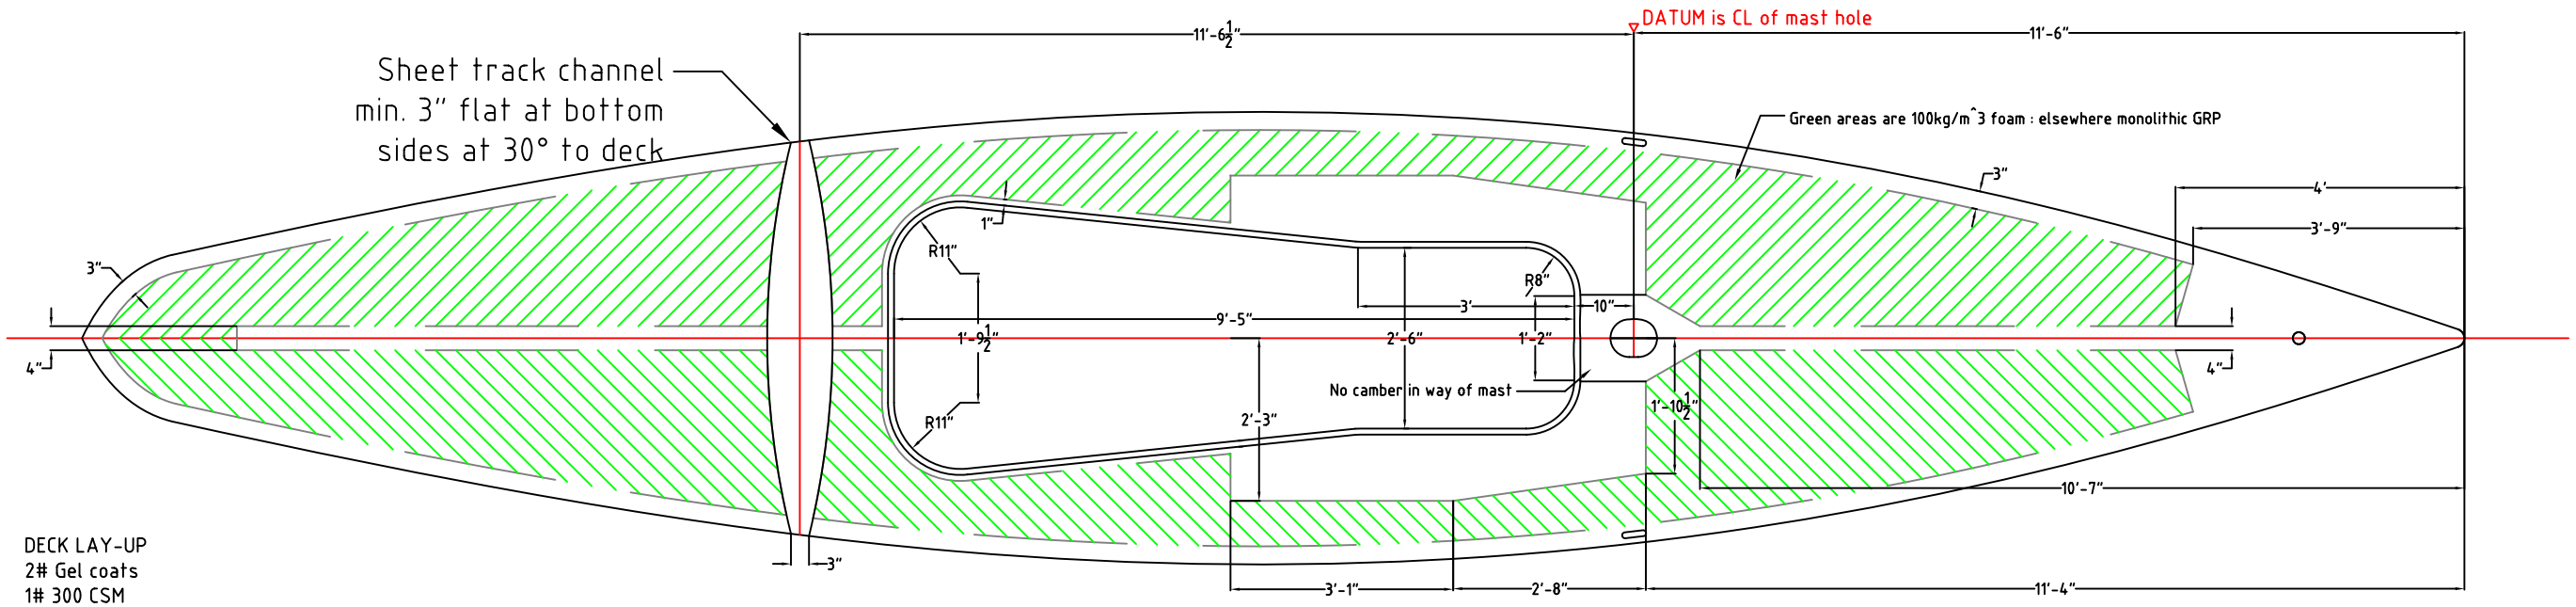

DECK LAY-UP
2# Gel coats
1# 300 CSM
2# 600 CSM
13mm core 100kg/m^3 Corecell or equivalent
2# 600 CSM
Plus 1# 600 CSM in monolithic areas

Nominal thickness c.20mm
Min. thickness of monolithic sections to be 6mm

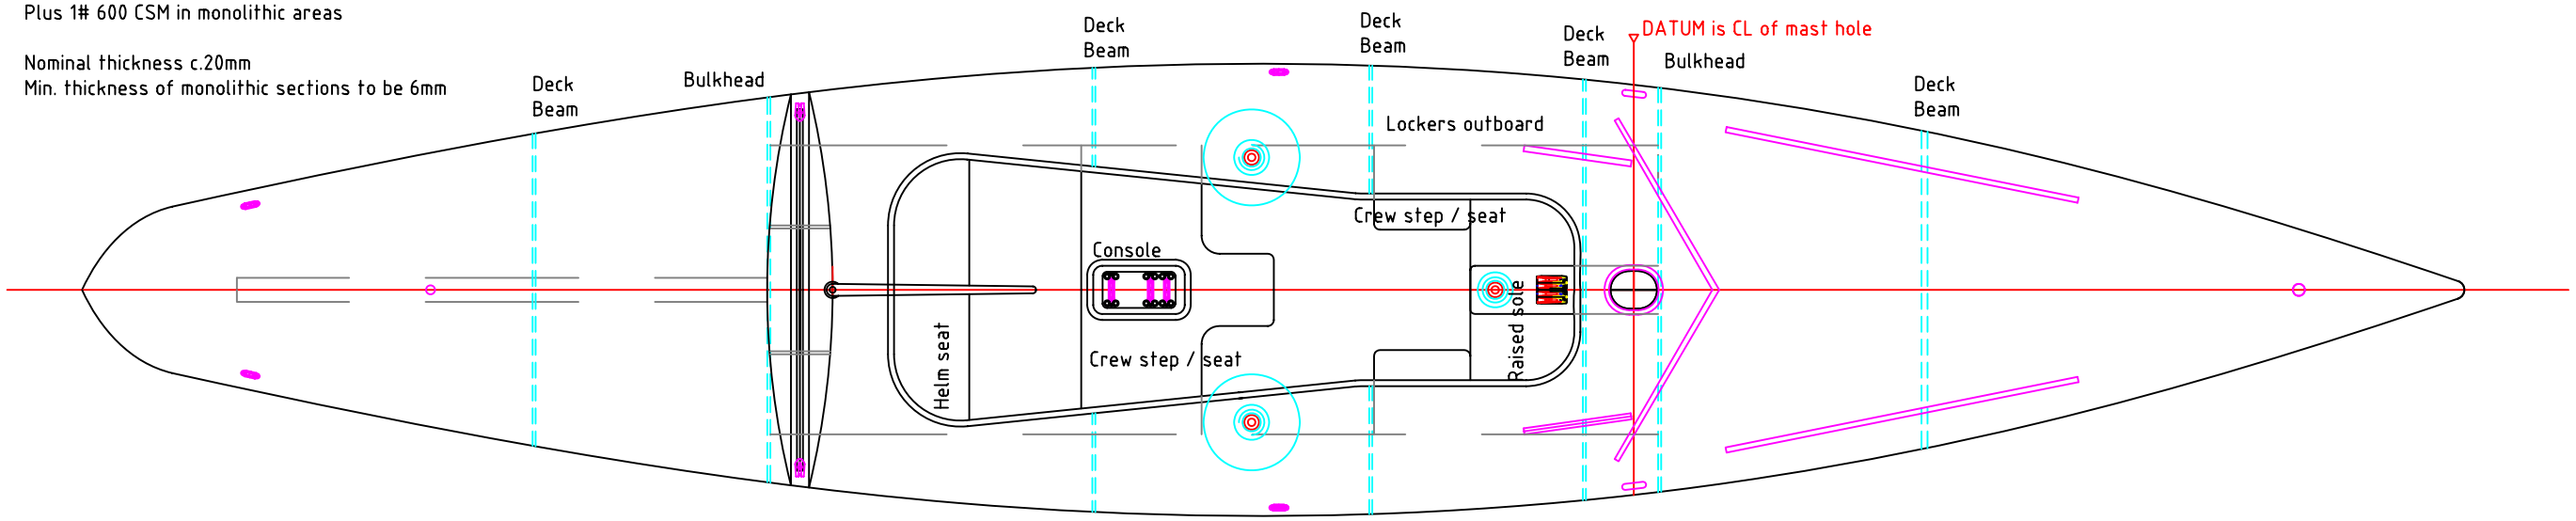

Winches (2# per side) to be fitted in monolithic sections.
If the centre of any winch is more than 10"/250mm from a supporting deck beam, additional beam(s) to be fitted.

DECK CONSTRUCTION
Deck is to be cambered to constant radius of 20ft, with polyester resin, "E" glass, Corecell and polyurethane sections; for hand lay up. Construction is to comply with Daring Class Association Rules for Construction, including resin / glass ratios, unless otherwise noted.

FITTINGS
All loaded deck fittings should be through-bolted with oversize backing plates.
High load items land mainly in monolithic areas of deck. Loaded items in cored areas will require compression tubes. No fittings to be screwed.

WINCH POSITIONS
The monolithic sections should accommodate the majority of existing winch positions, in line with existing class drawings. If winches are to be fitted in cored areas, these will need quilting to monolithic.

TOE RAILS & BREAKWATER
Owner's preference regarding material, height, form etc. Toe rails may be as per deck beams, bonded to deck with bonding paste.

SCALE
Metres
0 1 2
Feet
0 2 4 6

THEO RYE
Tel / Fax : +44 (0)1962 793125 Mobile : +44 (0)7720 300072 e-mail : TheoRye2@aol.com

Project
Daring Too

DWG	Deck dimensions
DATE	02-Mar-09
SCALE	1:30 (A4) Verify on scale
DRAWN	TR

Copyright of this drawing is the property of the designers and must not be used without their permission